

Ready to Fly Model Rocket Operating Instructions

Specifications:

Diameter: .99in
Length: 11.73in
Nosecone: Polyethelene
Fins: Laser-cut Tube Fins
Weight: 1 oz
Recovery: 24in Streamer

Performance
Up to 1,000 feet on a C6-5
Up to 500 feet on a B6-4
Up to 250 feet on a A6-4

Recommended Rocket Motors:
A6-4,A8-3,A8-5,B4-4,B6-4,B6-6,C6-5


Flying Your Rocket

Flight checklist:

- Model Rocket
- Launch Pad & Controller w/Batteries
- Recovery Wadding
- Model Rocket Motors and Igniters

Recommended Motors for the Turbo rocket are B4-4, B6-4, C6-3 & C6-5


Step 1 – Insert 2 crumpled recovery wadding sheets into the body tube and the folded shock cord after the recovery wadding.

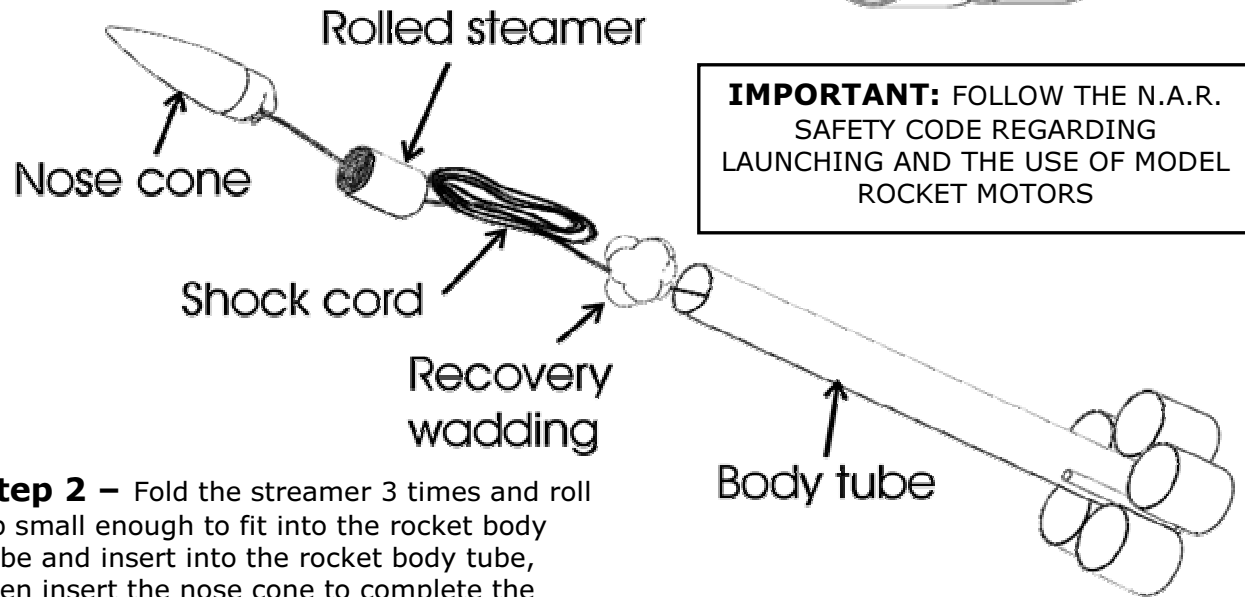

Step 2 – Fold the streamer 3 times and roll up small enough to fit into the rocket body tube and insert into the rocket body tube, then insert the nose cone to complete the recovery assembly.

Step 3 – Install model rocket motor igniter according manufacturers recommended procedure.

Step 4 – Insert the rocket motor with the nozzle/igniter end facing the rear of the rocket. If the rocket motor is loose, add masking tape to the outside of the rocket motor until the motor inserts with enough friction to retain the motor during flight. It should not eject during recovery ejection.

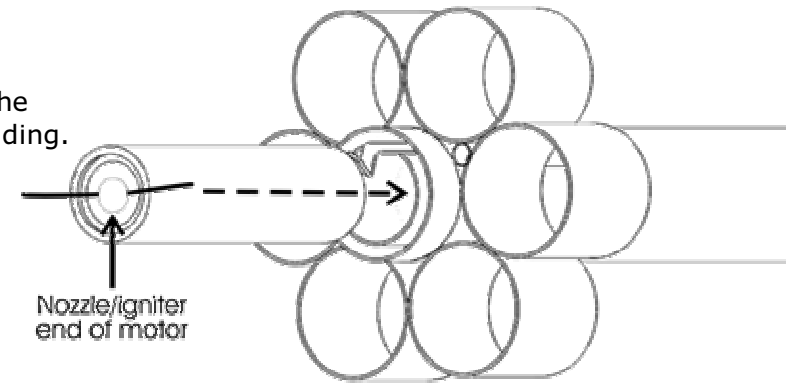

IMPORTANT: FOLLOW THE N.A.R. SAFETY CODE REGARDING LAUNCHING AND THE USE OF MODEL ROCKET MOTORS